



# Q2-PRESSURE ACTIVATED PLUNGER


Q2-Pressure Activated Plunger is designed to pump fluids more efficiently by cleaning barrel chamber. It is recommended for high water cuts, high abrasive well conditions and sand laden fluids.

## FEATURES & ADVANTAGES


- Spray metal coated plunger protects against corrosion and wear.
- Plunger has 0.005” fit size to allow trash to pass by the plunger.
- Rings help to lift sand, trash and scale through the barrel.

## SPECIFICATIONS

- Plunger is manufactured from 1026 Carbon Steel tubing material.
- Plunger is spray metal coated with Nickel or Tungsten Carbide.
- Minimum thickness of spray metal is 0.010 in. per side.
- Plunger is available in 20, 40, 60 or 80 rings.

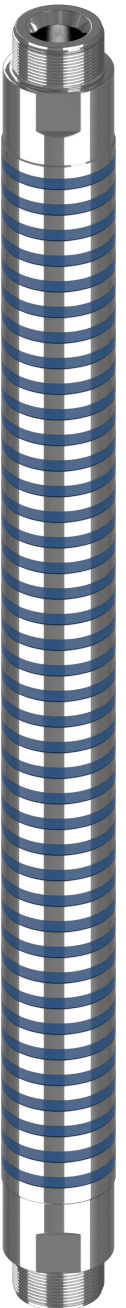

Pump Bore (in.)	Part Number		Plunger OD (in.)	Thread Size
	Plunger	Ring		
1-1/4	105D(R)	105RD-X	1.250	1.0000-14
1-1/2	105F(R)	105RF-X	1.500	1.2500-14
1-3/4	105H(R)	105RH-X	1.750	1.4704-14
1-25/32	105J(R)	105RJ-X	1.781	1.4704-14
2	105K(R)	105RK-X	2.000	1.5604-14
2-1/4	105M(R)	105RM-X	2.250	1.8024-14
2-1/2	105N(R)	105RN-X	2.500	2.1095-11.5
2-3/4	105P(R)	105RP-X	2.750	2.1095-11.5
3-1/4	105R(R)	105RR-X	3.250	2.8000-11.5
3-3/4	105T(R)	105RT-X	3.750	3.1715-11.5
4-3/4	105ZB(R)	105RZB-X	4.750	4.0000-10

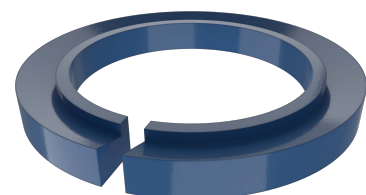

“R” in plunger part number represents number of rings.  
“X” in ring part number represents type of material